



KONTUR



CATALOGUE

PRODUCTS OF KON-TUR Sp. z o. o. Sp. k.

Contents

About the Company	02-03
Export	04
Test Section	05
Advantages of Our Products	06-07
Product Groups	08-09
Paints	10-15
Rollplastik	16-17
Spray	18-19
Cold Plastic	20-25
Thermoplastic	26
Thermoplastic Spray	27
Solvents	28
Primers	29
Glass Beads	30
RAL Palette	31

KON-TUR Sp. z o. o. Sp. k.
Woskrzenice Duże 132
21-500 Biała Podlaska
POLAND

Tel.: + 83 341 16 00
E-mail: kontur@kontur.eu
www.kontur.eu



We

„From the very beginning, we have believed that road safety starts with quality and responsible decisions. We combine expert knowledge, innovative technologies, and our own experience to deliver reliable and durable solutions. Every line, every layer of paint, and every technological solution serves a single purpose – to guide safely to the destination.

Our quality is not just a promise. It is a standard that we transform every day into the safety of road users. We aim to maintain our position as a leader in Poland and expand across European markets; therefore, we consistently pursue one core idea: our quality must translate into the safety of every road user.”

Ilya Charmentka



Get to know our company

KONTUR has been in existence since 2000, but our activity is based on over 25 years of experience of specialists in the field of road works. We are a leading manufacturer of materials for horizontal road marking and marking machines. Our products are also increasingly available in a growing number of European countries. The materials we offer have been recognized and trusted by the largest companies in the road works industry, both domestically and abroad for years. Opinions and recommendations from our partners allow for continuous improvement of the materials sold. We have our own laboratory where each product is thoroughly analyzed. We have obtained a quality management certificate according to ISO 9001, as well as numerous certification systems. Our motto is "**Safely into the future**". The motto emphasizes the appropriate quality standards of our products, confirmed by certificates and many years of experience in the road industry.



KONTUR Advantages

- ✓ Unique formulas, innovative solutions, constant supervision over technological processes.
- ✓ Performance testing and product certification.
- ✓ Strong relationships with customers, partners, suppliers, and high quality of services.
- ✓ Favorable quality-to-price ratio.
- ✓ Constant availability of the products offered.
- ✓ Quick order processing time.
- ✓ Advisory support in the application and selection of adequate products to meet customer needs.

Export



Customers receive purchased materials with comprehensive logistical support.

A full range of production and logistical capabilities allows us to deliver any quantity of ordered products to any, even the most remote, places in Europe.

Deliveries to other parts of the world, using various branches of transport, are not an obstacle for us.

We have the necessary experience in intermodal transport. In response to our customers' expectations, we have developed a number of solutions that allow for quick and timely delivery of our products.

We do not close ourselves off to any markets. **All countries are within our reach.**



We test for You!


KONTUR continuously conducts tests on the quality of its materials for horizontal road marking. The development of new products or the improvement of existing ones is not only a matter of work of our technologists. In addition to laboratory tests, we conduct production and road tests. The introduction of a new product or improvement of its quality is confirmed by appropriate certificates and positive customer reviews.

Experimental section

Proper road marking is a very important element that affects traffic safety. Each horizontal marking has its durability, depending on the type of material, thickness of the marking, and traffic intensity. The increasing road traffic load, higher requirements for visibility of markings to the human eye and to autonomous driving systems in cars pose a great challenge, also for manufacturers of materials for horizontal road marking.

Quality guarantee

We work in accordance with a certified quality management system according to ISO 9001. Our products are subjected to regular internal and external supervisory unit tests, as a result of which, the manufactured materials are durable, fulfill their function and serve for a long time.

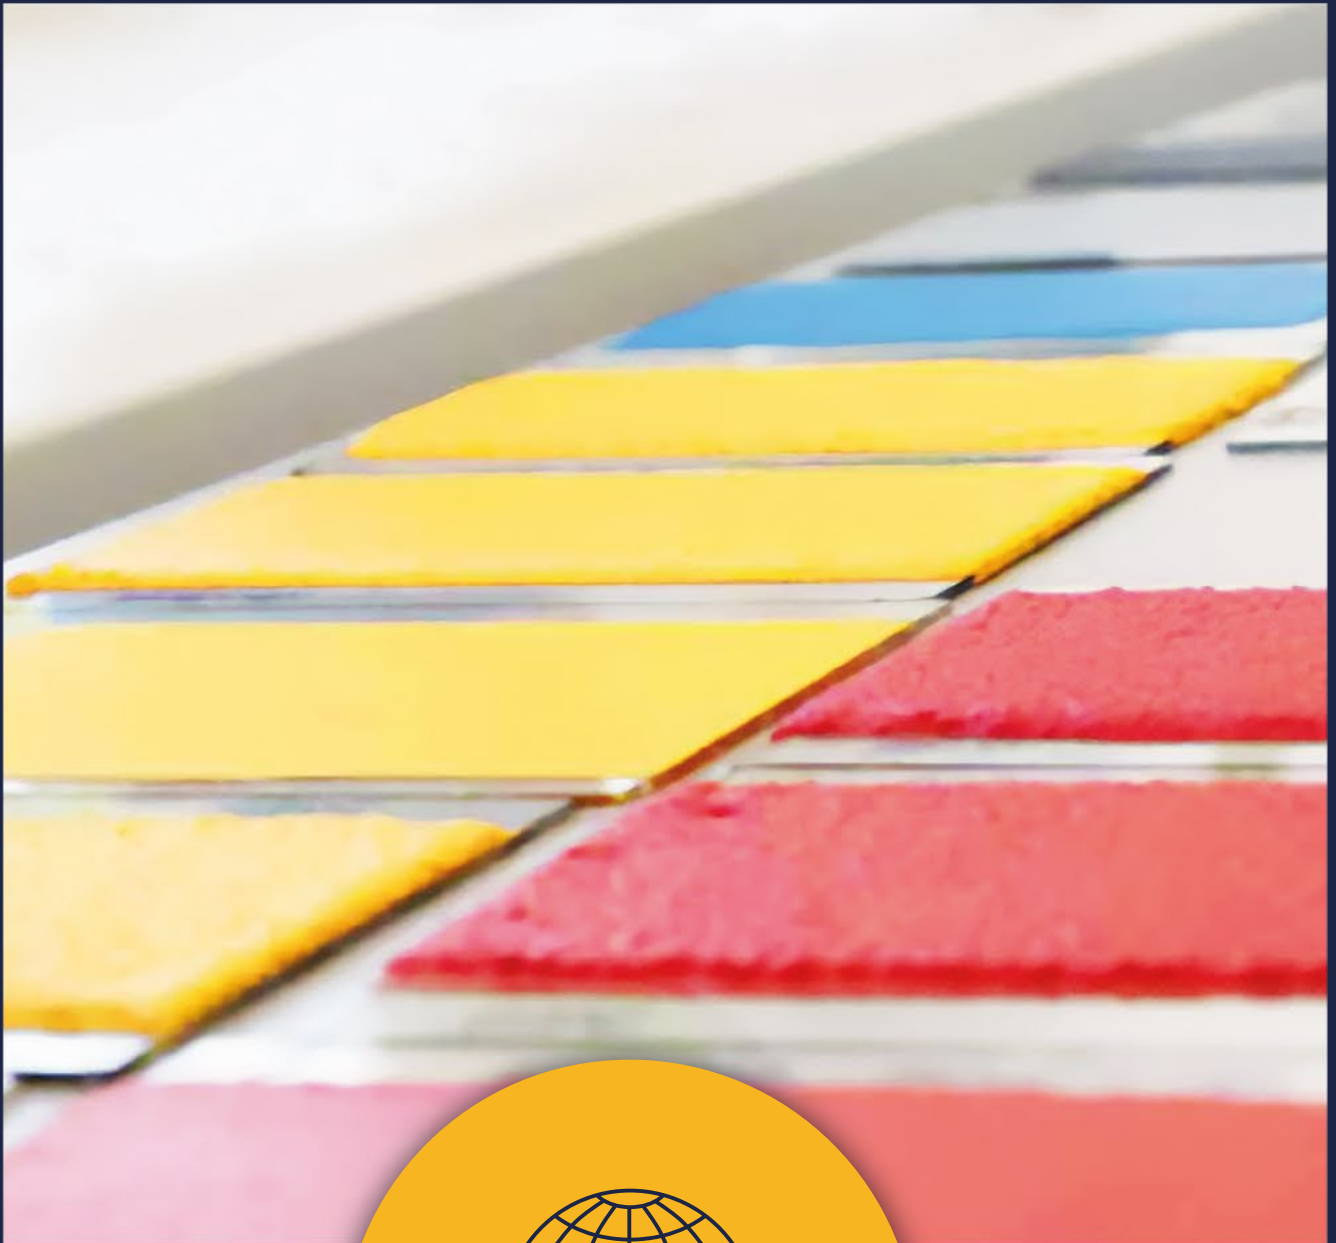



Advantages of our products

Thanks to our expert knowledge, we offer products that have been on the market for many years as well as innovative product solutions that meet the individual needs of customers.


The advantages of our products include:

- ✓ A wide range of environmentally friendly products.
- ✓ Reliability confirmed by numerous certificates.
- ✓ Ease of product application.
- ✓ Availability of chemically curing compound in many variants depending on the customer's needs.


PRODUCT GROUPS




PAINTS

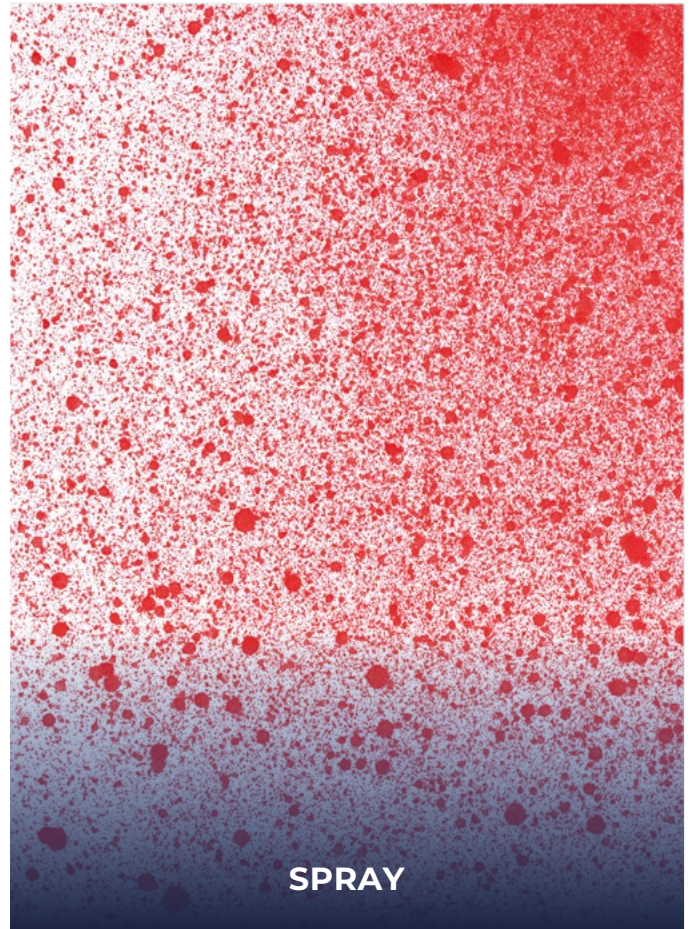

SPRAY

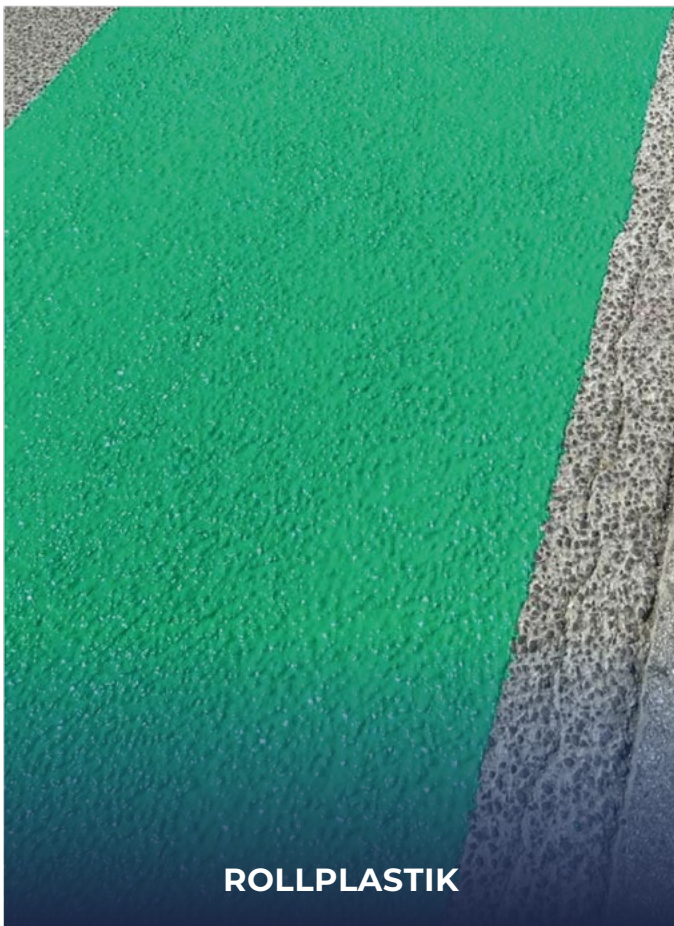

ROLLPLASTIK

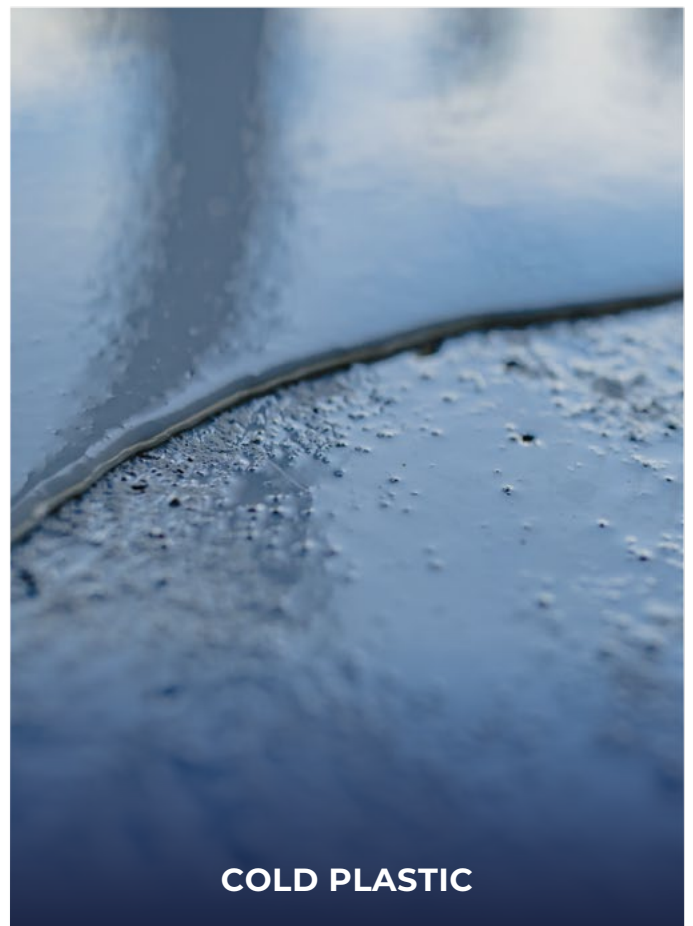


COLD PLASTIC




THERMOPLASTIC



PRIMERS

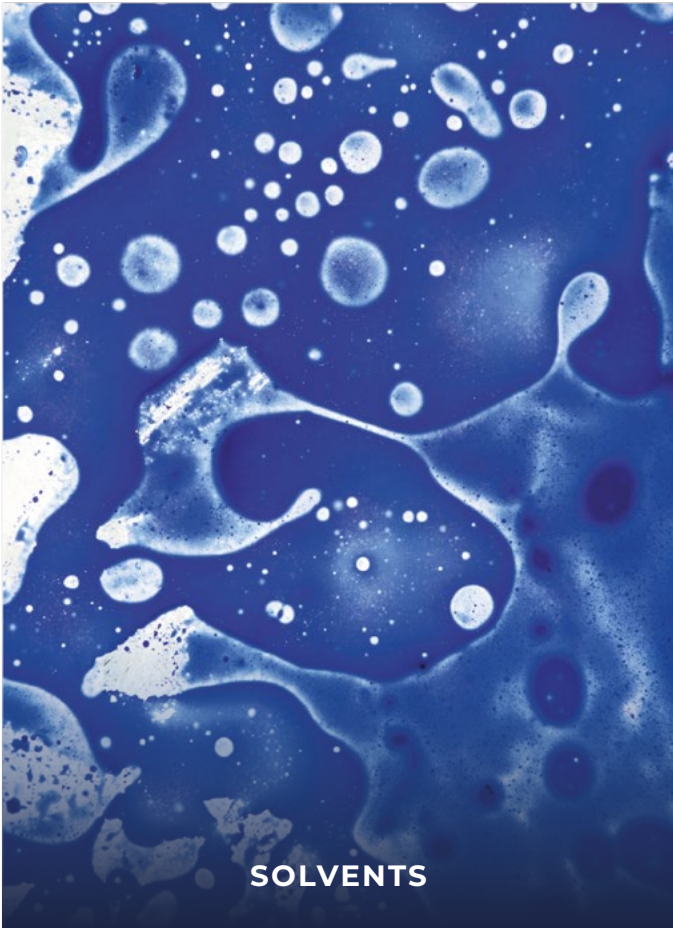

SOLVENTS

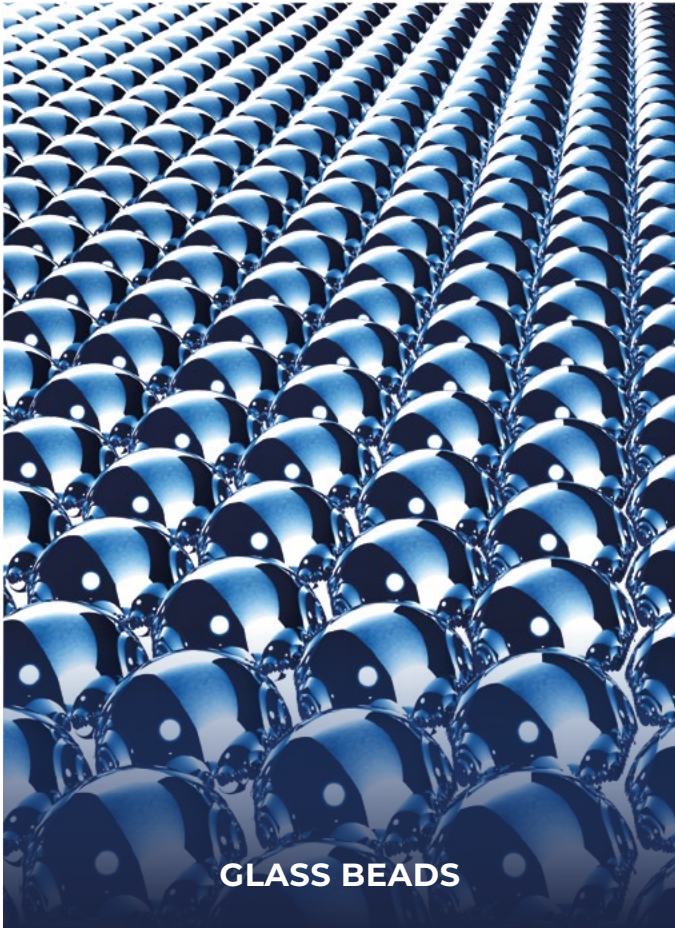


GLASS BEADS

KONTUR PAINT

Solvent-based paint for horizontal road marking

KONTUR road paints are acrylic, one-component, fast-drying paints designed for thin-layer horizontal road marking of urban and extra-urban roads, parking lots, maneuvering areas, and industrial areas. KONTUR paints are dedicated for use on asphalt and concrete surfaces. They are characterized by high durability, good adhesion to the substrate, high coverage, resistance to weather conditions, and high abrasion resistance.

KONTUR paints belong to the group of products with a high dry mass content and low emission of volatile organic compounds. KONTUR paints, after application with the use of glass microbeads, acquire reflective properties.

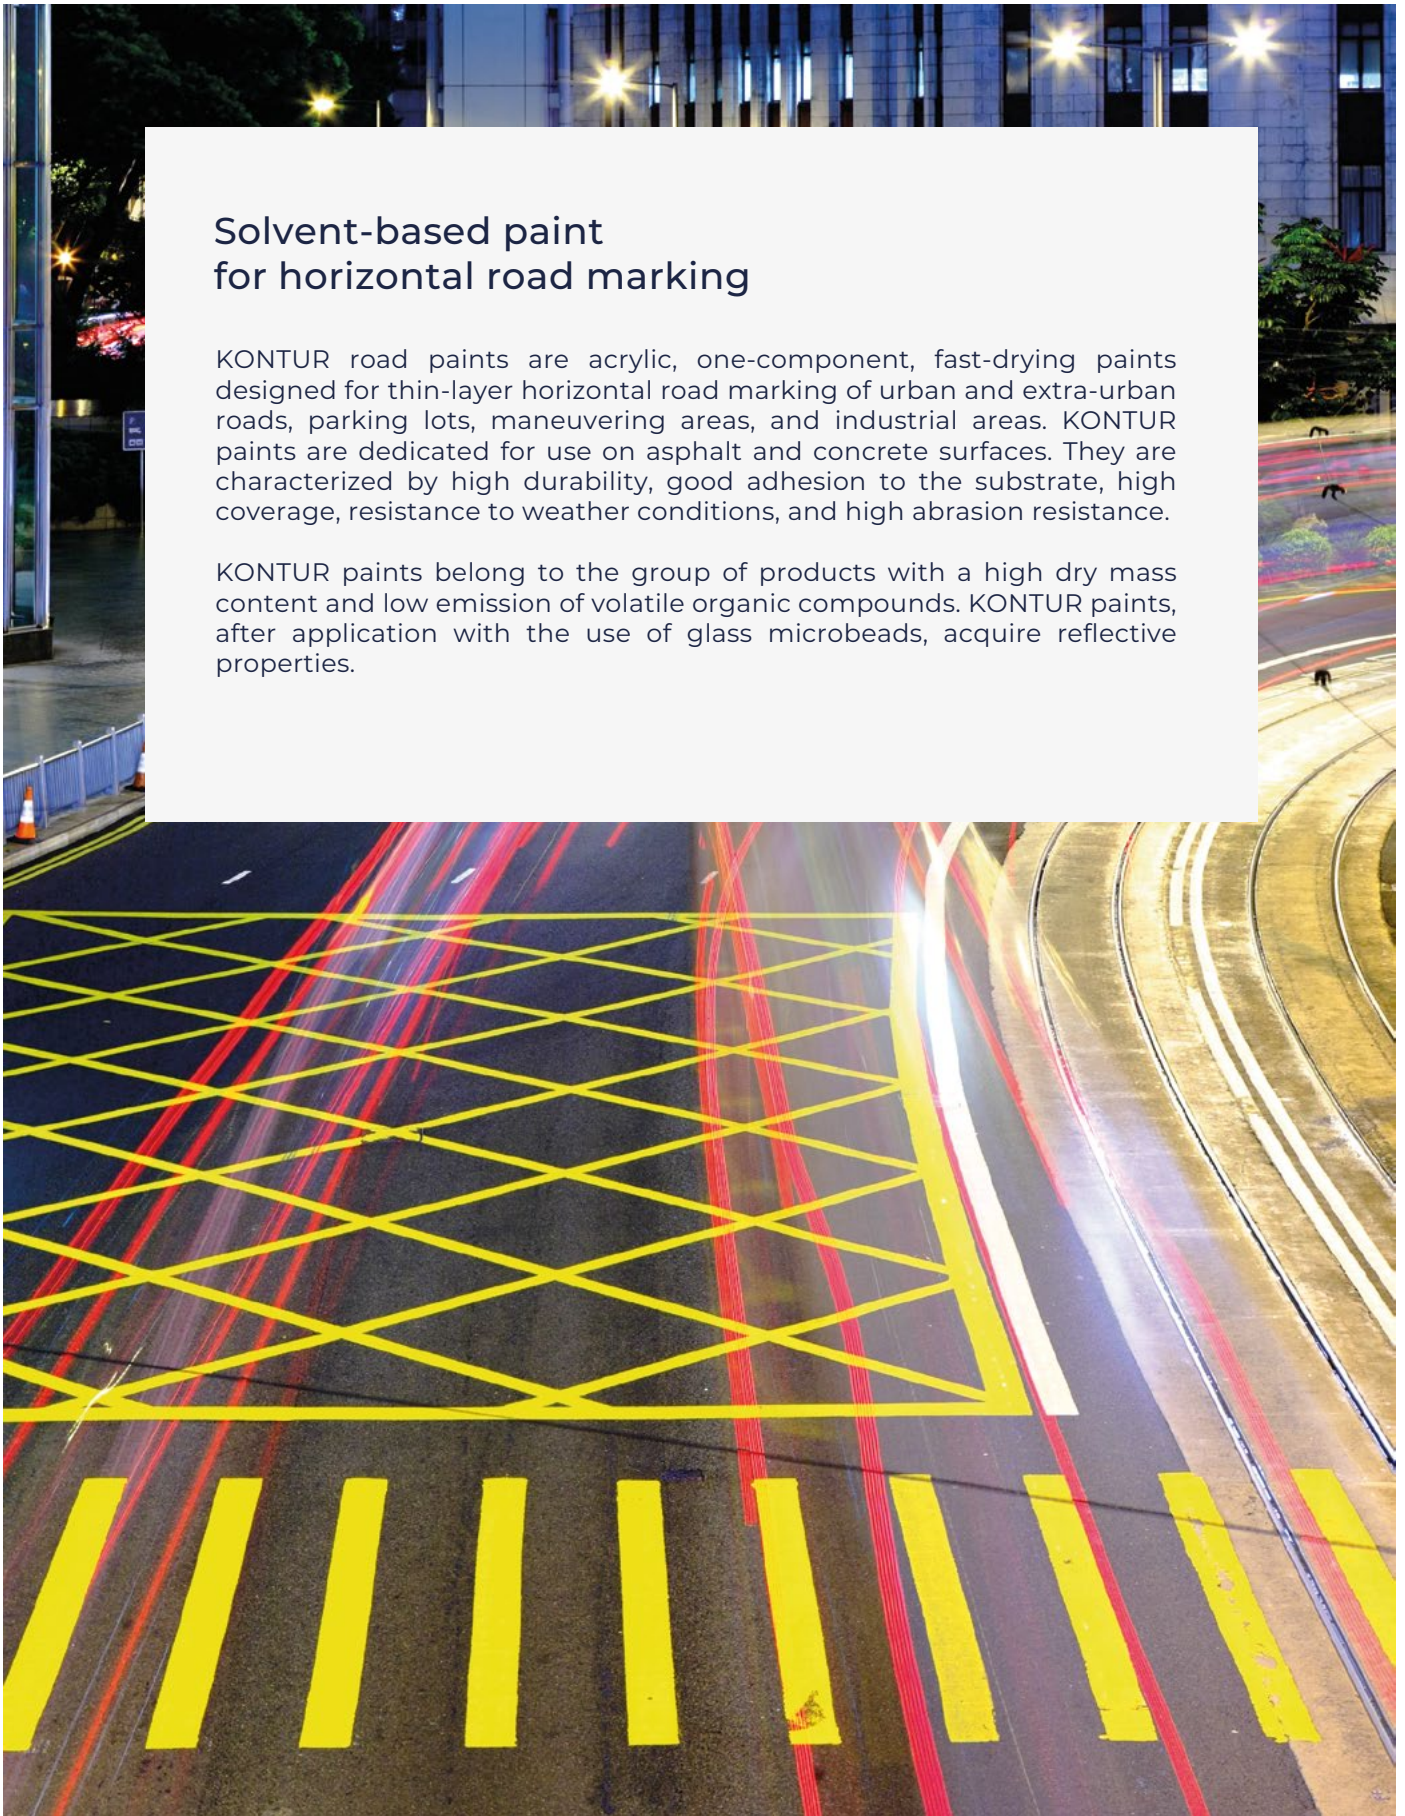

KONTUR PAINTS ARE AVAILABLE IN THESE COLOURS:

KONTUR PAINT, KONTUR PLUS, KONTUR UNIVERSAL white	KONTUR PAINT yellow	KONTUR PAINT red	KONTUR PAINT blue	KONTUR PAINT green	KONTUR PAINT grey	KONTUR PAINT black
RAL 9016	RAL 1023	RAL 3020	RAL 5017	RAL 6024	RAL 7037 RAL 7046	RAL 9004

Application method:

KONTUR paints are intended for all types of painting machines (hydrodynamic and pneumatic) as well as for manual painting. When the paint is applied to concrete-surfaced roads, the use of **PRIMER** is recommended to improve the adhesion of the paint to the substrate.

Recommended consumption:

From 0.56 kg/m² to 0.98 kg/m², depending on the application technique.

Packaging:

Metal bucket 33 kg, barrel 300 kg, IBC container 1600 kg.

We also offer **KONTUR PLUS** white paint, with higher visibility and reflectivity during the day and at night, higher retention of glass microbeads as well as resistance to UV and weather conditions, and economical **KONTUR UNIVERSAL** paint.



CERTIFICATES:



POLAND
Instytut Badawczy Dróg i Mostów



THE CZECH REPUBLIC
SILNIČNÍ VÝVOJ – ZDZ



SLOVAKIA
Výskumný ústav dopravný



SPAIN
*Asociación Para El Estudio De Las Tecnologías
De Equipamiento De Carreteras*

KONTUR ECOPLUS PAINT

Solvent-based paint for horizontal road marking

KONTUR ECOPLUS paint is intended for traffic engineering for making all types of thin-layer horizontal markings of roads, squares, parking lots, and other road and communication surfaces with an asphalt or concrete wear layer. KONTUR ECOPLUS paint adheres well to the substrate, has good anti-slip properties and has a long durability. This paint belongs to the group of products with a high content of dry mass, which are characterized by low emission of volatile organic compounds; the paint does not contain aromatic solvents in its composition. KONTUR ECOPLUS paint, after application with a sprinkle of glass microbeads, acquires reflective properties, while a sprinkle with aggregate raises its anti-slip properties.

KONTUR ECOPLUS PAINTS ARE AVAILABLE IN THESE COLOURS:

KONTUR ECOPLUS PAINT white	KONTUR ECOPLUS PAINT yellow	KONTUR ECOPLUS PAINT red	KONTUR ECOPLUS PAINT blue	KONTUR ECOPLUS PAINT green	KONTUR ECOPLUS PAINT black
RAL 9016	RAL 1023	RAL 3020 RAL 3013	RAL 5017	RAL 6024 RAL 6018	RAL 9005

Application method:

KONTUR ECOPLUS paints are intended for all types of painting machines (hydrodynamic and pneumatic) as well as for manual painting.

Recommended consumption:

From 0,48 kg/m² to 0,96 kg/m², depending on the application technique.

Packaging:

Metal bucket 25/33 kg, IBC container 1600 kg.

We also offer economical **KONTUR ECOPLUS 21** paint.



CERTIFICATES:

bast GERMANY
BAST

aetec SPAIN
Asociacion Para El Estudio De Las Tecnologias
De Equipamiento De Carreteras

KONTUR H₂O PAINT

KONTUR H₂O PAINT IS AVAILABLE IN COLOURS:

KONTUR H₂O
PAINT white

RAL 9016

Application method:

Suitable for machine application with an airless system.

Recommended consumption:

From 0.41 kg/m² to 0.57 kg/m². Actual consumption depends on the thickness of the applied layer and the type and condition of the surface.

Packaging:

Plastic bucket 25 kg.

KONTUR water-based paint for thin-layer horizontal road marking is a paint based on an acrylic emulsion, with a low content of volatile organic compounds. It does not contain lead. Water-based paint compared to solvent-based paints is more environmentally friendly, which is associated with lower waste disposal costs. In traffic engineering, it is intended for making all types of thin-layer horizontal road markings, squares, parking lots, and other road and communication surfaces with an asphalt or concrete wear layer. It is characterized by high covering power, excellent adhesion, and resistance to abrasion. The paint, when used with a sprinkle of glass microbeads, acquires reflective properties, and thanks to a sprinkle with aggregate, it gains even better anti-slip properties.



KONTUR 2K PAINT

KONTUR 2K PAINT IS AVAILABLE IN COLOURS:

KONTUR 2K PAINT white	KONTUR 2K PAINT yellow
RAL 9016	RAL 1023

Application method:

Suitable for manual and machine application with an airless system.

Recommended consumption:

From 0,48 kg/m² to 1,11 kg/m². The given material consumption is indicative, and varies depending on the application technique.

Packaging:

Component A: **KONTUR 2K white PAINT** – metal bucket 18 kg.

Component B: Hardener for **KONTUR 2K** is supplied together with the paint.

KONTUR 2K paint is a two-component paint for thin-layer horizontal marking of roads, squares, parking lots, warehouse halls, based on epoxy resin, cold-hardened. This product includes: component A, which is a suspension of pigments, fillers, auxiliary agents in liquid resin, and component B - hardener (catalyst). White two-component paint is a material resistant to mechanical loads, adherent over the entire surface, resistant to the effects of weather factors: sunlight, water, and sodium chloride solution. KONTUR 2K paint is characterized by high resistance to chemical substances, and moisture. It works great in a marine, industrial, urban environment. Due to its chemical and mechanical resistance, it ensures a high standard and long-lasting durability of the coating.



KONTURPLAST ROLLPLASTIK



KONTURPLAST ROLLPLASTIK liquid cold plastic is a two-component, solvent-free material for thin-layer horizontal road marking, cold-hardened. This product includes: liquid chemically curing compound and peroxide hardener (catalyst). KONTURPLAST ROLLPLASTIK liquid cold plastic is intended for traffic engineering, for making all types of horizontal markings of roads, squares, parking lots, and other road and communication surfaces with an asphalt or concrete wear layer. KONTURPLAST ROLLPLASTIK liquid cold plastic is a fast-curing material, resistant to mechanical loads, adherent over the entire surface, resistant to the effects of weather factors: sunlight, water, and sodium chloride solution.

KONTURPLAST ROLLPLASTIK IS AVAILABLE IN COLOURS:

KONTURPLAST ROLLPLASTIK white	KONTURPLAST ROLLPLASTIK yellow	KONTURPLAST ROLLPLASTIK red	KONTURPLAST ROLLPLASTIK blue	KONTURPLAST ROLLPLASTIK green	KONTURPLAST ROLLPLASTIK grey	KONTURPLAST ROLLPLASTIK black
RAL 9016	RAL 1023	RAL 3020 RAL 3013	RAL 5017	RAL 6024 RAL 6018	RAL 7042 RAL 7043	RAL 9004

Application method:

The mixture of the compound with the hardener is prepared directly before use in a weight ratio of 98:2. After mixing the compound with the hardener, the product is ready for application. It should be poured onto the surface marked by the tape and spread with a long-haired paint roller and/or scraper, depending on the desired texture. For best results, the tape should be removed before the product hardens.

Recommended consumption:

From 1.4 to 1.5 kg/m² for a layer with a thickness of 0.9 mm.

Packaging:

Component A: **KONTURPLAST ROLLPLASTIK** - metal bucket 18 kg.

Component B: Hardener: granular – packaging 400 g, liquid – packaging 20 kg.



SPRAY

KONTURPLAST KSP SPRAY

2-component 98:2

Application method:

KONTURPLAST KSP spray is intended for all types of painting machines and for manual painting. Exact setting values during application depend on application conditions and the appropriate type of machine (manufacturer's machine instructions should be followed). The mixture of spray + hardener is prepared directly before use in a weight ratio of 98:2.

Recommended consumption:

From 0.48 kg/m² to 1.12 kg/m² for a layer with a thickness of 300 µm to 700 µm. The given material consumption is indicative, and varies depending on the application technique.

Packaging:

Component A: **KONTURPLAST** spray - metal bucket 20/25 kg, barrel 300 kg, IBC container 1500 kg.
Component B: Hardener: granular – packaging 400 g, liquid – packaging 20 kg.

Two-component, solvent-free material for thin-layer horizontal road marking, cold-hardened. This product includes: chemically curing spray and peroxide hardener (catalyst). KONTURPLAST spray is intended for traffic engineering, for making all types of thin-layer horizontal markings of roads, squares, parking lots, and other road and communication surfaces with an asphalt or concrete wear layer. KONTURPLAST spray, depending on the used sprinkle, can be used both as type I permanent marking and type II permanent marking. KONTURPLAST spray is a fast-curing material, resistant to mechanical loads, adherent over the entire surface, resistant to the effects of weather factors: sunlight, water, and sodium chloride solution. After application with a sprinkle of glass beads, it acquires reflective properties.



KONTURPLAST
SPRAY

RAL 9016

KONTURPLAST SPRAY 3-component 50:50

Application method:

KONTURPLAST SPRAY is suitable for all machine types that can process three-component products, as well as for manual processing. The exact setting values during processing depend on the processing conditions and the respective machine type. (Follow the machine manufacturer's instructions.).

Recommended consumption:

From 0.48 kg/m² to 1.12 kg/m² for a layer with a thickness of 300 µm to 700 µm. The indicated material consumption is a guideline value that may vary depending on the application method.

Packaging:

Component A: **KONTURPLAST SPRAY A** – metal bucket 20/25 kg, barrel 300 kg, IBC container 1500 kg.
Component B: **KONTURPLAST SPRAY B** – metal bucket 20/25 kg, barrel 300 kg, IBC container 1500 kg.
Component C: Hardener as granules – 400 g packaging, liquid – 20 kg packaging.

Three-component, solvent-free material for thin-layer horizontal road marking, cold-hardened. This product includes: components A and B, component C - peroxide hardener (catalyst).

KONTURPLAST SPRAY is intended for traffic engineering, for making all types of thin-layer horizontal markings of roads, squares, parking lots and other road and communication surfaces with an asphalt or concrete wear layer. KONTURPLAST SPRAY 3K is a fast-curing material, resistant to mechanical loads, adherent over the entire surface, resistant to the effects of weather factors: sunlight, water, and sodium chloride solution.

KONTURPLAST SPRAY, depending on the used sprinkle, can be used both as type I permanent marking and type II permanent marking.

After application with a sprinkle of glass beads, it acquires reflective properties.



KONTURPLAST
SPRAY

RAL 9016

KONTURPLAST

KONTURPLAST COLD PLASTIC For machine or manual application

KONTURPLAST COLD PLASTIC is a two-component, solvent-free compound, used cold, for thick-layer horizontal road marking in areas loaded with heavy and intense traffic, such as pedestrian crossings, stop and yield lines, directional and guiding arrows, as well as segregating and edge lines. The compound is intended for making markings in a smooth, or structural form, or dots. Markings made using KONTURPLAST cold plastic offer many important benefits in terms of road safety, including high visibility at night. They are also characterized by good adhesion to the substrate, do not crack during operation and are resistant to the effects of sunlight, water, and sodium chloride solution. The delivery of KONTURPLAST compound includes: cold plastic and hardener. The hardener acts as a catalyst, causing the compound to harden. To obtain reflectivity of the marking, the compound should be sprinkled with glass beads immediately after application. In our offer, we distinguish four versions of the cold plastic KONTURPLAST: for manual application, machine application, universal (manual and machine application), and for precise thick-layer application, which is recommended for structural, profiled marking.

KONTURPLAST COLD PLASTIC IS AVAILABLE IN COLOURS:

KONTURPLAST white	KONTURPLAST yellow	KONTURPLAST red	KONTURPLAST blue	KONTURPLAST green	KONTURPLAST orange
RAL 9016	RAL 1023	RAL 3020	RAL 5017	RAL 6024	RAL 2009

Application method:

KONTURPLAST compound can be applied manually using a trowel, plastomarker or by machine using a self-propelled machine. In the case of application on a paved surface or cement concrete, the KONTUR PRIMER grounding agent should be used.

Recommended consumption:

From 2.90 kg/m² to 9.8 kg/m² depending on the method of application.

Packaging:

Component A: White **KONTURPLAST** - metal bucket 15/20/25/30/35 kg, barrel 350 kg, IBC container 1500 kg.

Component B: Coloured **KONTURPLAST** are available in packaging - metal bucket 18/25/30 kg.



CERTIFICATES:



POLAND
Instytut Badawczy Dróg i Mostów



THE CZECH REPUBLIC
SILNIČNÍ VÝVOJ – ZDZ



SLOVAKIA
Výskumný ústav dopravný



FRANCE
ASQUER



GERMANY
BAST

KONTURPLAST RP ROLL ANTI-SLIP COMPOUND

KONTURPLAST RP ROLL COLD PLASTIC IS AVAILABLE IN COLOURS:

KONTURPLAST RP ROLL white	KONTURPLAST RP ROLL red	KONTURPLAST RP ROLL green
RAL 9016	RAL 3020	RAL 6024

Application method:

The KONTURPLAST RP ROLL cold plastic should be applied manually using a roller, or rubber squeegee. In the case of application on a cement concrete surface, the use of a grounding agent is recommended.

Recommended consumption:

From 2.7-4.5 kg/m².

Packaging:

Component A: **KONTURPLAST RP ROLL** compound - metal bucket 18 kg.

Component B: Hardener: granular – packaging 400 g, liquid – packaging 20 kg.

KONTURPLAST RP ROLL COLD PLASTIC

A two-component liquid compound designed for roller application, used cold for marking bike paths, crossings between paths, sidewalks, bridge decks, and pedestrian crossings. Its purpose is to ensure appropriate surface properties that affect the safety of using bike paths, i.e., visual information about the route, roughness, improvement of surface evenness. Surfaces marked using KONTURPLAST RP ROLL compound quickly become passable, adhere well to the substrate, are flexible - do not crack during use, and are resistant to sunlight, water, and sodium chloride solution. The ready-to-use cold plastic for bike paths KONTURPLAST RP ROLL consists of: KONTURPLAST compound and hardener (in separate packaging). The peroxide hardener acts as a catalyst. If necessary, to achieve reflectivity of the marking, immediately after spreading the KONTURPLAST RP ROLL compound, sprinkle the marking with glass microbeads.



KONTURPLAST RP ANTI-SLIP COMPOUND

KONTURPLAST RP COLD PLASTIC IS AVAILABLE IN COLOURS:

KONTURPLAST RP white	KONTURPLAST RP yellow	KONTURPLAST RP red	KONTURPLAST RP blue	KONTURPLAST RP green	KONTURPLAST RP grey	KONTURPLAST RP black
RAL 9016	RAL 1023	RAL 3020 RAL 3013	RAL 5017	RAL 6024 RAL 6018	RAL 7042 RAL 7043	RAL 9004

Application method:

The **KONTURPLAST RP** cold plastic should be applied manually using a roller, or rubber squeegee. In the case of application on a paved or cement concrete surface, the use of a grounding agent is recommended.

Recommended consumption:

From 4 kg/m² to 6 kg/m² for a layer from 2 mm to 3 mm.

Packaging:

Component A: **KONTURPLAST RP** compound - metal bucket: 18/25 kg.

Component B: Hardener: granular – packaging 400 g, liquid – packaging 20 kg.

KONTURPLAST RP COLD PLASTIC

A two-component compound, used cold for marking bike paths, crossings between paths, sidewalks, bridge decks, pedestrian crossings, and designating special zones. Its purpose is to ensure appropriate surface properties that affect the safety of using bike paths, i.e., visual information about the route, roughness, improvement of surface evenness. Surfaces marked using KONTURPLAST RP compound quickly become passable, adhere well to the substrate, are flexible - do not crack during use, and are resistant to sunlight, water, and sodium chloride solution. The ready-to-use cold plastic for bike paths KONTURPLAST RP includes: KONTURPLAST compound and hardener (in separate packaging). The peroxide hardener acts as a catalyst. To achieve high roughness, immediately after spreading, sprinkle the product with the appropriate aggregate. To achieve reflectivity of the marking, immediately after spreading the KONTURPLAST compound, sprinkle the marking with glass microbeads.



COLD PLASTIC KONTURPLAST DECO

Application method:

The **KONTURPLAST DECO** cold plastic in neutral colour should be applied manually using a roller or rubber squeegee on a previously prepared/cleaned asphalt layer.

In the case of application on a cement concrete substrate, the use of a PRIMER underlay is recommended to ensure better adhesion.

Recommended consumption:

From 4 to 5 kg/m² with aggregate sprinkling (2.5-5mm) from 10 to 12 kg/m² (aggregate Consumption).

From 2 to 5 kg/m² with micro-aggregate sprinkling (1.2-2.5mm) from 5 to 6 kg/m² (aggregate consumption).

Packaging:

Component A: **KONTURPLAST DECO** compound in neutral colour - metal bucket 20 kg.

Component B: Hardener: powdery – packaging 400 g.

Two-component cold plastic in neutral colour with aggregate

KONTURPLAST DECO cold plastic in neutral colour is intended for special zones and decorative markings. It ensures safety for users, thanks to high anti-slip properties. The cold plastic is characterized by good adhesion to the substrate, appropriate flexibility (does not crack during use) and is resistant to weather conditions and sodium chloride solution. Marking should be applied on a hardened substrate with asphalt layers. To achieve the desired decorative effect and high roughness of the marking, immediately after its application, sprinkle the surface with the appropriate aggregate. At the customer's request, we provide the appropriate type of aggregate. The layer made of KONTURPLAST DECO compound is not a load-bearing (structural) layer of the marking.



RESTORER COLD ROAD REPAIR COMPOUND

RESTORER COLD ROAD REPAIR COMPOUND IS AVAILABLE IN COLOUR:

RESTORER
black

RAL 9004

Application method:

The **RESTORER** compound should be applied manually using a spatula (trowel), immediately after mixing with the hardener.

Recommended consumption:

Depending on the surface and depth of the defect. In the case of a 5 mm layer thickness, the consumption is 10 kg/m².

Packaging:

Component A: Chemically curing **RESTORER** compound – metal bucket 25 kg.

Component B: Hardener: powdery – packaging 400 g.

RESTORER

Two-component, solvent-free, coarse-grained black RESTORER cold plastic, used cold for road defect repairs. The RESTORER compound is intended for repairing defects in surfaces with a bituminous wearing layer, in roads, on squares, parking lots. The compound is used cold. The curing of the compound occurs after mixing it with the catalyst. The delivery of the RESTORER compound includes: cold plastic based on synthetic resin and peroxide hardener. The peroxide hardener acts as a catalyst. The filling made with RESTORER compound is characterized by good adhesion to the substrate, high mechanical resistance and roughness. The filling does not crack during use and is resistant to sunlight, water and sodium chloride solution.



THERMOPLASTIC FOR HOT APPLICATION

EKVATOR THERMOPLASTIC

Application method:

EKVATOR Thermoplastic is used for horizontal road markings by methods: extrusion or screed box. It is used in melted form, after heating to the required temperature.

Recommended consumption:

From 4 kg/m² to 6 kg/m², for a layer of 2-3 mm. For full marking: from 5 to 6 kg/m² (at a layer thickness of 2.5-3 mm). For structural marking: 4.5 kg.

Packaging:

Pallet weighing 999 kg, containing 54 easy-melt polyethylene bags of 18.5 kg each.




POLAND
Instytut Badawczy Dróg i Mostów



GERMANY
BAST

EKVATOR THERMOPLASTIC

It is used for horizontal road marking in full, structural or acoustic technology. It is a powdered product. The product, before its application to the substrate, must be heated to a liquid form, in accordance with the instructions for use. Marking made with thermoplastic offers many important benefits in terms of road safety, including high visibility at night. EKVATOR compound is characterized by high visibility during the day and at night, good adhesion to the substrate, high abrasion resistance, resistance to cracking during use and resistance to sunlight and brine. An important advantage is the possibility of application immediately after laying the wearing layer of the bituminous surface. The long lifespan means that this type of marking is cost-effective, as it requires less frequent renewal. The thermoplastic does not contain substances harmful to the environment. To achieve reflectivity of the marking, immediately after application, the compound should be sprinkled with glass beads or a mixture of glass beads and anti-slip aggregate.

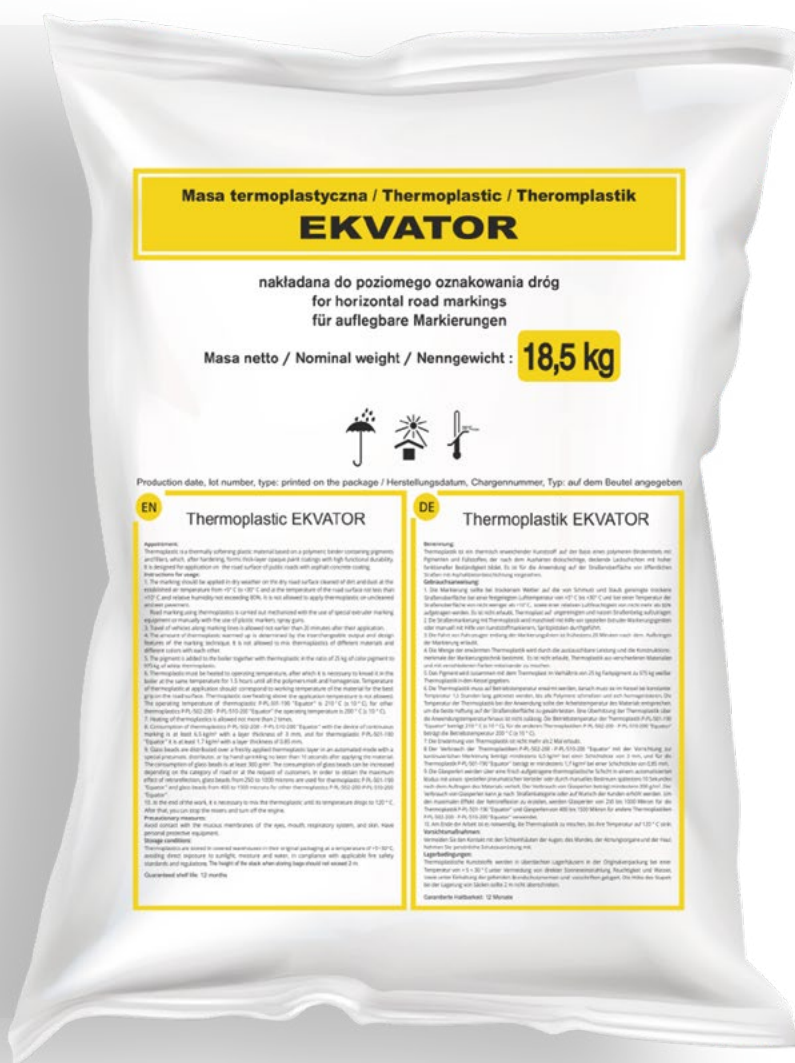

EKVATOR
THERMOPLASTIC
COMPOUND white

RAL 9016

EKVATOR THERMOPLASTIC SPRAY

Application method:

Mechanical spreading using a specialized self-propelled machine. It is used in melted form, after heating to the required temperature. In the case of using EKVATOR thermoplastic spray for markings on concrete surfaces, it is necessary to prepare the concrete surface by mechanical cleaning, e.g., by milling with high-pressure water and priming with a solvent-based synthetic rubber solution.

Recommended consumption:

From 2.0 to 3.3 kg/m² for full marking, depending on the thickness of the layer (0.9-1.5 mm).

Packaging:

Pallet weighing 999 kg, containing 54 easy-melt polyethylene bags of 18.5 kg each.

EKVATOR THERMOPLASTIC SPRAY

EKVATOR thermoplastic spray is used for horizontal road marking. It is a product in powdered form. The product, before its application to the substrate, must be heated to a liquid form, in accordance with the instructions for use. It is used for hot application of horizontal road markings in full technology, for the renewal of existing thermoplastic markings, as well as for marking squares, parking lots and other road and communication surfaces with an asphalt and concrete wearing layer. Due to its high durability, the product is recommended for marking places with high traffic intensity. Markings made with thermoplastic spray are characterized by good adhesion to the substrate, high resistance to abrasion and weather conditions, they do not crack during use and are resistant to sunlight and brine. To achieve reflectivity of the marking, immediately after application, the compound should be sprinkled with glass microbeads or a mixture of glass microbeads and anti-slip aggregate.



EKVATOR
THERMOPLASTIC
SPRAY white

RAL 9016

SOLVENTS

KONSOL SOLVENT

Solvent for road paints based on toluene, intended for thinning road paints from the KONTUR line at ambient temperatures below 10°C, and for cleaning equipment and tools used for application of products from the KONTUR and KONTURPLAST series. Detailed information is available in the safety data sheet.



Packaging:

Galvanized canister 18 kg.

KONSOL EP SOLVENT

KONSOL EP is a solvent based on aliphatic solvents. Intended for thinning road paints from the KONTUR 2K series at ambient temperatures below 10°C and for cleaning equipment and tools used for the application of road paints. Detailed information is available in the safety data sheet.



Packaging:

Galvanized canister 18 kg.

KONSOL ECOPLUS SOLVENT

Solvent KONSOL ECOPLUS for road paints, based on butyl acetate, dedicated for thinning road paints from the KONTUR ECOPLUS series at ambient temperatures below 10°C and for cleaning equipment and tools used for the application of road paints and chemically curing compounds. Detailed information is available in the safety data sheet.



Packaging:

Galvanized canister 18 kg.

KONTURPLAST COMPOUND REGULATOR

KONTURPLAST compound regulator, intended for diluting the chemically curing compound KONTURPLAST. Thanks to the use of the Regulator, better flow can be achieved at low temperatures.



Packaging:

Galvanized canister 18 kg.

PRIMERS

PRIMER FOR COLD PLASTIC KONTURPLAST AND KONTUR PAINT

Acrylic resin-based primer, colorless, fast-drying, intended for impregnation of concrete surfaces before applying the cold plastic KONTURPLAST or KONTUR paint. The primer ensures isolation of the concrete substrate and improves its adhesion. The grounding agent should be applied to a cement concrete surface, before applying the cold plastic KONTURPLAST or KONTUR paint, to improve its adhesion to the substrate. The substrate should be clean, dry, and free from dust, oil, or grease, and any other contaminants that weaken its adhesion.

Application method:

Apply the primer to the cleaned, properly prepared surface using a paint sprayer or brush. Leave to dry.

Packaging:

Metal bucket 18 kg.



EKVATOR PRIMER FOR THERMOPLASTIC

EKVATOR Primer is a fast-drying primer based on synthetic or natural resin, intended for impregnation of concrete surfaces before applying thermoplastic compound. This primer ensures isolation of the concrete substrate and improves the adhesion of the thermoplastic. EKVATOR Primer should be applied to a cement concrete surface, before applying the thermoplastic compound, to improve its adhesion to the substrate. The substrate should be clean, dry, and free from dust, oil, or grease, and any other contaminants that weaken the adhesion of the thermoplastic.

Application method:

Apply the primer to the cleaned, properly prepared surface using a paint sprayer. Leave to dry.

Packaging:

Metal bucket 18 kg.



REFLECTIVE GLASS BEADS

Glass beads are used for sprinkling materials for horizontal road marking to give them reflective properties. Thanks to the reflection of the headlights, the marking is also visible at night. The beads are available in many sizes, which are selected depending on the layer of the applied material – the thinner the material layer, the smaller beads should be used, because only well-embedded beads will be permanently bonded to the material and will fulfill their role. Too small beads, on the other hand, may get submerged in a thick layer. We also offer ready-made mixtures of reflective beads with hardening material, so that the marking can obtain additional anti-slip properties. The type of beads, granulation, and recommended consumption of the sprinkle are defined in national certificates depending on the type of marking.

Packaging:

Bag 25 kg.



RAL PALETTE

NOTE: There may be slight differences in shade between the actual colors and the colors shown below, the texture is for illustrative purposes only. RAL colors are approximate.



KON-TUR Sp. z o. o. Sp. k.
Woskrzenice Duże 132
21-500 Biała Podlaska, POLAND

Tel.: + 83 341 16 00
E-mail: kontur@kontur.eu
www.kontur.eu



KONTUR

Online Catalogue



KON-TUR Sp. z o. o. Sp. k.
Woskrzenice Duże 132
21-500 Biała Podlaska, POLAND

Tel.: + 83 341 16 00
E-mail: kontur@kontur.eu
www.kontur.eu